

CANTER 6S15

LEFT-HAND DRIVE

MODEL / VEHICLE TYPE 6S15

Cab type / crew	Standard, single cab / 3		
Model variant	46920212	46920312	46920512
FUSO model code	FEA51BL4SEUB	FEA51CL4SEUB	FEA51EL4SEUB

DIMENSIONS [MM]

Wheelbase	2500	2800	3400
Overall length	4640	4990	5790
Cab length		1510	
Width overall		1875	
Cab width		1695	
Height overall	2155	2155	2150
Track width	Front / rear 1390 / 1435		
Frame height (at end of frame)	790	800	785
Ground clearance		165	
Cab to rear axle	1975	2275	2875
Cab to end of frame	3230	3530	4270
Maximum body length**	3500	3995	4985
Frame width		700	
Front overhang		995	
Rear overhang	1145	1195	1395
Front axle to front of body		625	
Recommended distance cab to body		100	


WEIGHTS [KG]

Empty weight*		2255	2270	2300
	Front* / rear*	1540 / 715	1535 / 735	1550 / 750
Gross vehicle weight / gross combination weight		6000 / 9000		
Axle loads*	Front / rear	2300 / 4360		
Towed weight	Braked / unbraked	3000 / 750		
Chassis load bearing capacity*		3745	3730	3700

CALCULATED OUTPUT

Maximum speed	km/h	141		
Minimum turning circle [m]	Kerb to kerb	10.2	11.4	13.4
	Wall to wall	11.4	12.4	14.6

* The weight refers to the base vehicle (European series, including coolant, oil, 90% fuel, tyre sealant, tools and driver with 75 kg) without optional equipment. If any optional equipment is added, the weight changes accordingly. ** Calculated maximum value which should be checked depending on the body and application. Subject to change without notice. All data is approximate. The illustrations may contain accessories and items of optional equipment which are not part of the standard specification. The data sheet may contain product types and support services not available in certain countries.

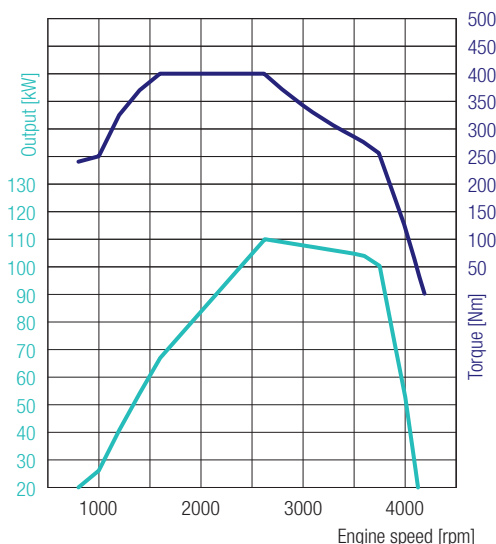

4P10 – 110 kW (150 PS)
 400 Nm@1600 rpm
 110 kW@2626 rpm

CANTER 6S15 LEFT-HAND DRIVE

ENGINE (EURO VI)

Type	Water-cooled four-stroke diesel engine with turbocharger, intercooler and direct injection		
No. of cylinders	4/in-line		
Capacity	2998 cm ³		
Peak output	110 kW (150 hp) / 2626 rpm		
Rated torque	400 Nm / 1600 rpm		
Diesel particulate filter	Service life approx. 300,000 km		
Alternator	Alternating current 12 V, 140 A		
Exhaust gas aftertreatment	DPF + SCR		
PTO (optional)	Type	31 kW with flange	31 kW for directly connected pumps
	Torque at peak output [Nm]:	196 Nm	
	Gear ratios	1:0.644	1:0.638
	Engine speed at peak output	1500 rpm	

POWERTRAIN

Transmission	Model	Manual gearbox, 5 forward gears, 1 reverse gear
	Gear ratio	5.494 / 3.193 / 1.689 / 1.000 / 0.723 / reverse 5.494
Rear axle gear ratio	Ratio	4.444

CHASSIS

Front axle / rear axle	Model	F200T / R030T
	Load-bearing capacity front/rear	2300 kg / 4360 kg
Tyres		205/75R16C 113/111 Q
		Twin tyres at rear
Wheel		16 x 5 1/2K - 115 - 8t - 5 wheel bolts
Steering		Left-hand drive
		Recirculating-ball steering with power assist, tilting telescopic steering column with steering-wheel lock
Brake	Service brake	Hydraulic with vacuum power assist, dual-circuit with load-dependent brake proportioning valve at rear wheels
	Front / rear	Disc brake (235 x 40)
	Parking brake	Mechanical expanding brake on drive shaft at rear of transmission
	Auxiliary brake	Exhaust brake (50 kW)
Suspension	Front / rear	Semi-elliptic leaf spring with shock absorber and stabiliser
Frame	Type	Ladder-type frame with reinforcements and crossmembers
Fuel tank capacity		70 litres
Electrical system	Batteries	12 V (100 Ah - 760 A(EN))